

Pocket Moisture Meter





Large Dual Graphical LCD

Displays moisture in wood and other building materials plus Air Temperature and Relative Humidity

Features:

- Unique Digital LCD readout with analog bargraph and numerical displays
- Simultaneous digital readout of moisture content plus ambient temperature or humidity with analog bargraph display of moisture, Max moisture values, and programmable wet/dry indication
- Use on wood, paper, wall board, sheet rock, cardboard, plaster, concrete, and mortar
- Memory contains 3 wood groups and 4 building material groups with calibrations for approximately 150 species of wood and 19 building material types
- Index Mode with programmable high and low values can be used to quickly locate moisture with comparative measurement
- Replaceable threaded measurement electrode pins
- Impact proof housing
- Auto power off conserves battery energy
- Battery operated for on-the-go measurements
- Built-in battery check and measurement verification test
- Complete with protective cap, replacement pins, and three CR-2032 button batteries

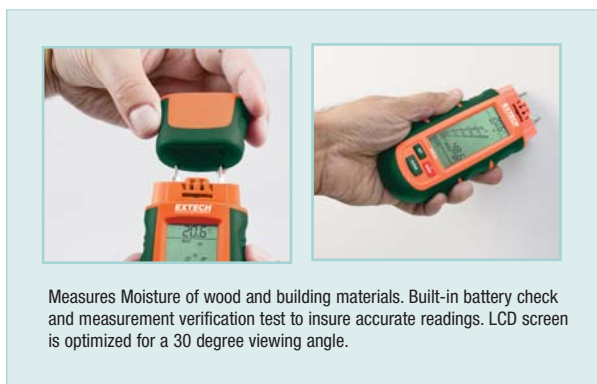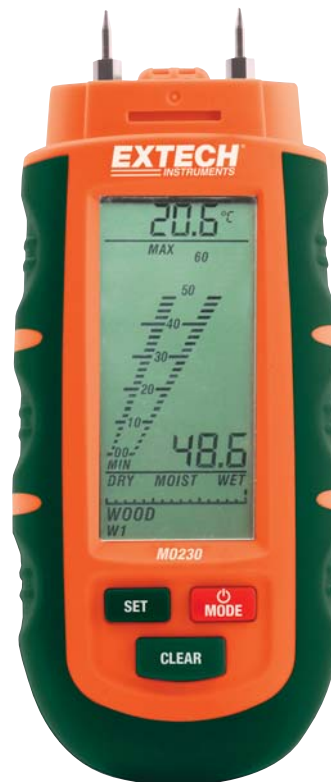

Specifications	
Wood Moisture Range	0 to 75%
Other Building Materials	0.1 to 24%
Temperature	-40 to 158°F (-40 to 70°C)
Relative Humidity	0 to 100%RH
Measurement principle	Electrical resistance
Electrode length	0.3" (8mm)
Electrode pins	Integrated, replaceable
Auto Power Off	After approx. 3 minutes
Operating Temperature	32 to 104°F (0 to 40°C)
Operating Humidity	85% Relative Humidity maximum
Power supply	Three CR-2032 button cells
Dimensions	6.25 x 2.5 x 1.2" (159 x 63.5 x 30.5mm)
Weight	3.5 oz (100g)

Ordering Information:

- M0230**.....Pocket Moisture Meter
M0200-PINS..Replacement pins (50 pins)

Contact:
Industrial Process Measurement, Inc.
3910 Park Avenue, Unit 7
Edison, NJ 08820
732-632-6400
support@instrumentation2000.com
<https://www.instrumentation2000.com/>

