


**DKB
BALL FLOAT FLOW INDICATOR**



Flow
Pressure
Level
Temperature
measurement
monitoring
control

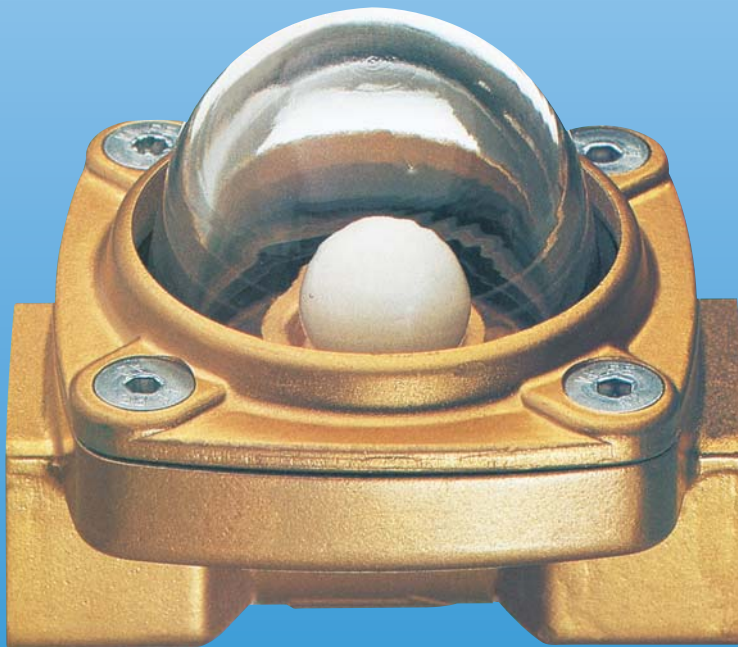

- Usable with Air
- Horizontal Installation
- Highly Visible
- Economical

S6

Contact:
Industrial Process Measurement, Inc.
3910 Park Avenue, Unit 7
Edison, NJ 08820
732-632-6400
support@instrumentation2000.com
<http://www.instrumentation2000.com>


Model:
DKB



Kobold's DKB flow indicator is ideal for use in either air or fluid flow applications. The absence of wear components assures high reliability in installations unsuitable for indicators using bearings with a rotating wheel or turbine. The DKB is easily seen from elevated positions. Our domed sight glass allows full 360° visibility from above. The bright float is easily seen from even large distances.

Specifications

Max. Temperature: 250°F
Max. Pressure: 85 PSIG
Installation Position: Horizontal

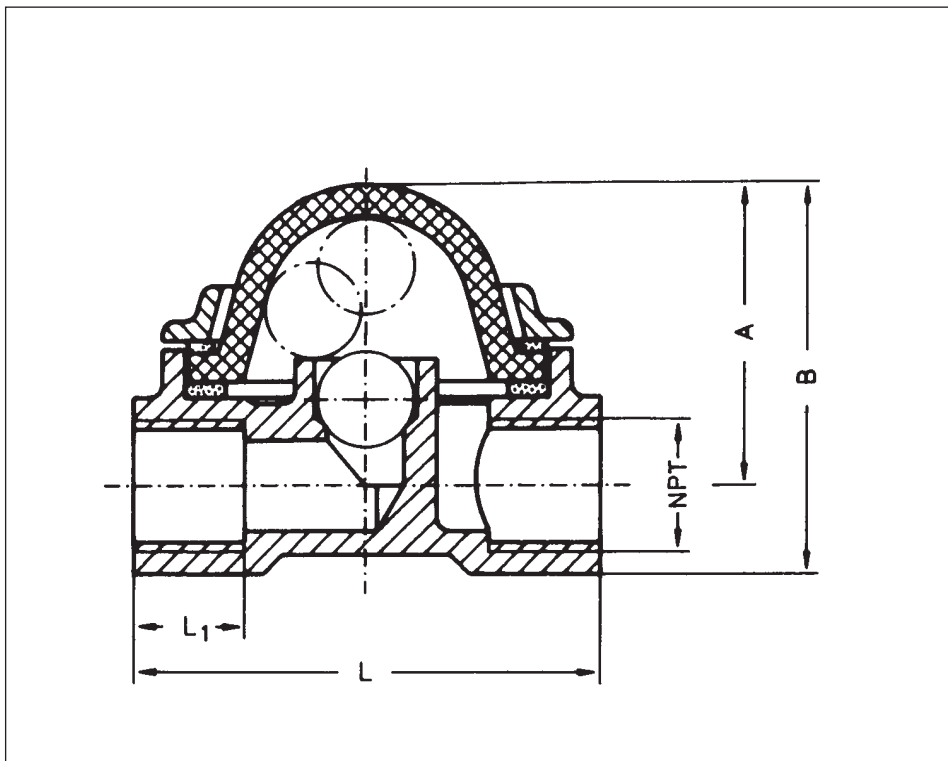

Materials		
	DKF-3100	DKF-3200
Housing	Brass	Brass
Sight Glass	Borosilicate Glass	Borosilicate Glass
Float	POM	PTFE
Seals	EPDM	FKM
Retaining Ring	Brass	Brass
Screws	Stainless Steel	Stainless Steel

Dimensions (mm)				
NPT	L ₁	L	A	B
1/8"	8	56	41	50
1/4"	10	56	41	50
3/8"	14	73	53	67
1/2"	14	73	53	67
3/4"	16	109	72	94
1"	18	109	72	94

Ordering Data									
Flow Rate				Fittings	Pressure Drop at Max. Flow	Weight	Order Numbers		
GPM Water		SCFM Air					Ball: POM Seals: EPDM	Ball: PTFE Seals: FKM	
Min.	Max.	Min.	Max.				Part Number	Part Number	
0.03	1.8	0.11	14	1/8"	15	0.66	DKB-3106	DKB-3206	
0.03	1.8	0.11	14	1/4"	15	0.62	DKB-3108	DKB-3208	
0.05	6.6	0.21	35	3/8"	15	1.2	DKB-3110	DKB-3210	
0.05	6.6	0.21	35	1/2"	15	1.1	DKB-3115	DKB-3215	
0.08	16	0.32	88	3/4"	15	3.1	DKB-3120	DKB-3220	
0.08	16	0.32	88	1"	15	2.8	DKB-3125	DKB-3225	