


## EN100/EN150 Environmental Meters with 11 Functions



Environmental meters measuring multiple indoor and outdoor conditions.

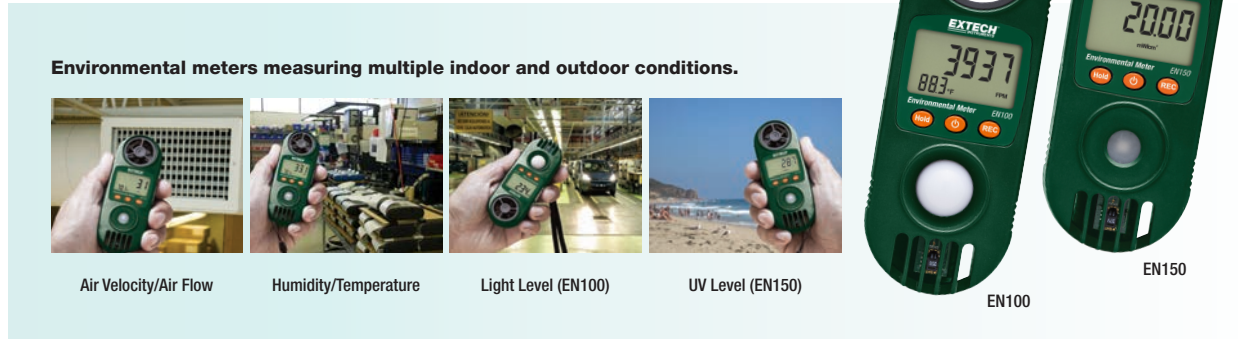

Air Velocity/Air Flow



Humidity/Temperature



Light Level (EN100)



UV Level (EN150)



EN100

EN150

### Common Features

- Built-in sensors measure 11 environmental conditions including Air Velocity, Air Flow, Temperature, Humidity, Wet Bulb, Dew Point, Heat Index, Wind Chill, Barometric Pressure, and Altitude
- Field replaceable low friction vane wheel improves air velocity accuracy
- Backlit LCD display (auto off after 5 seconds)
- Data Hold 'freezes' displayed reading
- Auto power off (with disable feature)
- Complete with built-in multiparameter sensors, wrist strap, and CR2032 battery.  
(Optional Pt -1000Ω probe, EN100-TP, for external temperature measurement)

### Model EN100 Additional Functionality

- Built-in Light sensor measures light level
- Auto-rotating display depending on function

### Model EN150 Additional Functionality

- Built-in UV sensor measures UV light level – Natural Sunlight Measurements

### Ordering

- EN100..... Environmental Meter (11 functions including Light Level measurement)
- EN150..... Environmental Meter (11 functions including UV Light measurement)
- EN100-TP ..... RTD Temperature Probe (PT-1000Ω)
- EN100-V ..... Replacement Vane for EN100 and EN150 (2pk)



Specifications	Range	Max Resolution	Basic Accuracy
<b>Light Level (EN100 only)</b>			
Foot Candles	0 to 1860Fc	0.1Fc	±5%
Lux	0 to 20,000Lux	1Lux	±5%
<b>UVA Light - 290nm to 390nm (EN150 only)</b>			
μW/cm <sup>2</sup>	0 to 1999μW/cm <sup>2</sup>	1μW/cm <sup>2</sup>	±4%FS
mW/cm <sup>2</sup>	2 to 20mW/cm <sup>2</sup>	0.01mW/cm <sup>2</sup>	±4%FS
<b>Air Velocity</b>			
ft/min (feet per minute)	80 to 3940 ft/min	1 ft/min	±3%FS
m/s (meters per second)	0.4 to 20m/s	0.1m/s	±3%FS
km/h (kilometers per hour)	1.4 to 72km/h	0.1km/h	±3%FS
MPH (miles per hour)	0.9 to 45MPH	0.1MPH	±3%FS
knots (nautical miles per hour)	0.8 to 38.8 knots	0.1knots	±3%FS
<b>Air Volume</b>			
CFM	0.847 to 1,271,300CFM	0.001CFM	
CMM	0.024 to 36,000CMM	0.001CMM	
<b>Temperature (with optional probe)</b>	14 to 212°F (-10 to 100°C)	0.1°F/°C	±2.5°F/±1.2°C
<b>Temperature (ambient)</b>	32 to 122°F (0 to 50°C)	0.1°F/°C	±2.5°F/±1.2°C
<b>% Relative Humidity</b>	10 to 95%RH	0.1%RH	±4%RH of reading
<b>Wet Bulb</b>	22.3 to 120.2°F (-5.4 to 49.0°C)	0.1°F/°C	calculated
<b>Dew Point</b>	-13.5 to 120.2°F (-25.3 to 49.0°C)	0.1°F/°C	calculated
<b>Wind Chill</b>	15.1 to 111.6°F (-9.4 to 44.2°C)	0.1°F/°C	±3.6°F/±2°C
<b>Heat Index</b>	32 to 212°F (0 to 100°C)	0.1°F/°C	±3.6°F/±2°C
<b>Barometric Pressure</b>			
inHg	0.29 to 32.48inHg	0.01inHg	±0.05inHg
mmHg	7.5 to 825mmHg	0.1mmHg	±1.2mmHg
hPa	10 to 1100hPa	0.1hPa	±2hPa
<b>Altitude</b>			
feet (ft)	-6000 to 30000ft	1ft	±50ft
meter (m)	-2000 to 9000m	1m	±15m
Dimensions	4.7 x 1.7 x 0.7" (120 x 45 x 20mm); Vane: 1.2" (31mm)		
Weight	5.6oz (160g)		